

---

### LTE/5G Dipole Antenna

---

- LTE/5G Dipole Antenna
- 2,0-5,0 dBi Gain
- Multi-band
- Adhesive tape mount
- Omni-radiant




**RoHS**

### Electrical Specification

Parameter	Description
Communication System	5G/4G/3G/AMPS/GSM/DCS/UMTS/LTE
Frequency Band (MHz)	690~960/1710~2170/2500~2700/3300~3800MHz
Average Efficiency	46%/62%/58%/50%/58%
Peak Gain	2.0~5.0dBi
Nominal Impedance	50 ohm
Polarization	Vertical
Radiation Pattern	Omni-directional
Return Loss	Separate sheet
V.S.W.R	<1.5 : 1
<b>Note: Specification includes the cable loss</b>	

### Mechanical Specification

Parameter	Description
Antenna Type	External Antenna T-Type
Mount Type	Adhesive (3M) Tape Mount
Antenna cable	RG174 Low loss cable
Connector Type	SMA 180°(Male) std.
Antenna Cable Total Length	2500mm ±50mm std.
Antenna Color	Black
Waterproof	100% waterproof
Operating Temperature Range	-35°C~+75°C
Storage Temperature Range	-40°C~+80°C

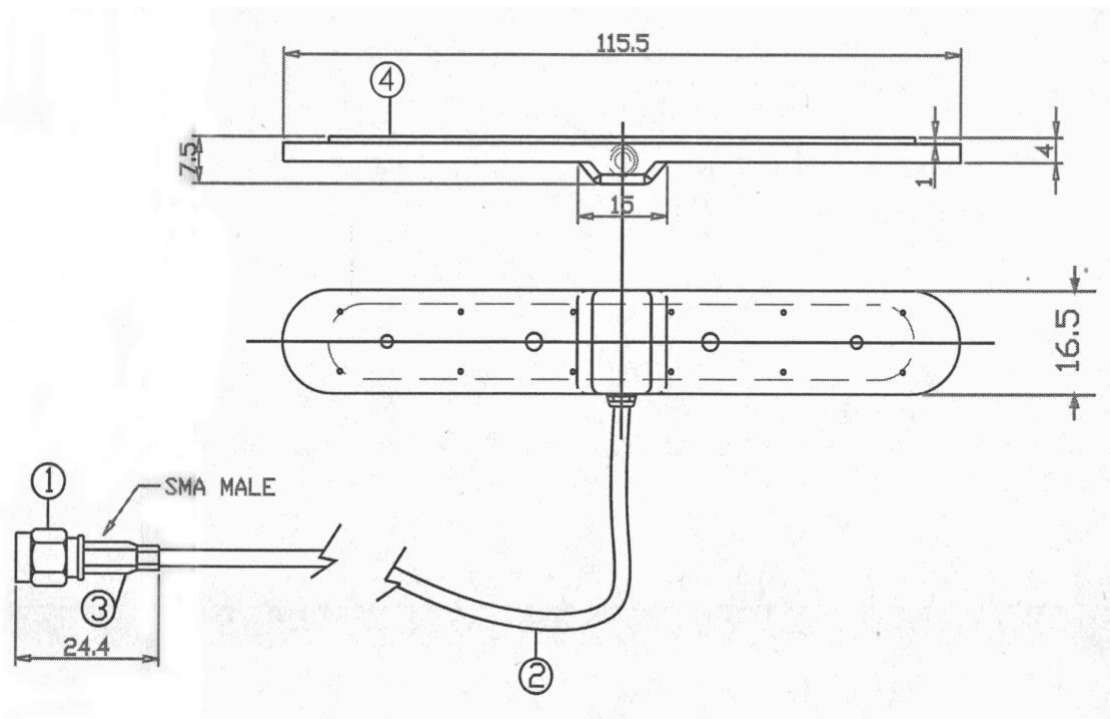

## Ordering codes

Type	Description	Comment
ADA-0062-5G	Adhesive Tape	LTE/5G

For the latest updates, visit our Web site: [www.adactus.se](http://www.adactus.se)

### **Disclaimer**

Information furnished is believed to be accurate and reliable. However, Adactus assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Adactus reserves the right to make changes without further notice to any product herein to improve reliability, function or design. Adactus does not assume any liability arising out of the application or use of any product described herein.

This publication supersedes and replaces all information previously supplied. Adactus products are not authorised as critical components in life support devices or systems.

