
LTE/5G Blade Antenna

- LTE/5G Dipole Antenna
- 2,0-5,0 dBi Gain
- Multi Frequency Band
- Swivel SMA Connector
- Omni-radiant




RoHS

Electrical Specification

Parameter	Description
Communication System	5G/4G/3G/AMPS/GSM/DCS/UMTS/WCDMA
Frequency Band (MHz)	690~960/1710~2170/2500~2700/3300~3800MHz
Gain	2.0~5.0dBi
Nominal Impedance	50 ohm
Polarization	Vertical
Radiation Pattern	Omni-directional
Return Loss	Separate sheet
V.S.W.R	<2.0 : 1
Note: Specification includes the connector loss	

Mechanical Specification

Parameter	Description
Antenna Type	External Antenna Blade Type
Mount Type	Swivel
Antenna Material	PCB & ABS
Connector Type	SMA Plug (Male) std.
Antenna Dimensions	188mm
Antenna Colour	ABS Black
Waterproof	N/A
Operating Temperature Range	-35°C~+75°C
Storage Temperature Range	-40°C~+80°C

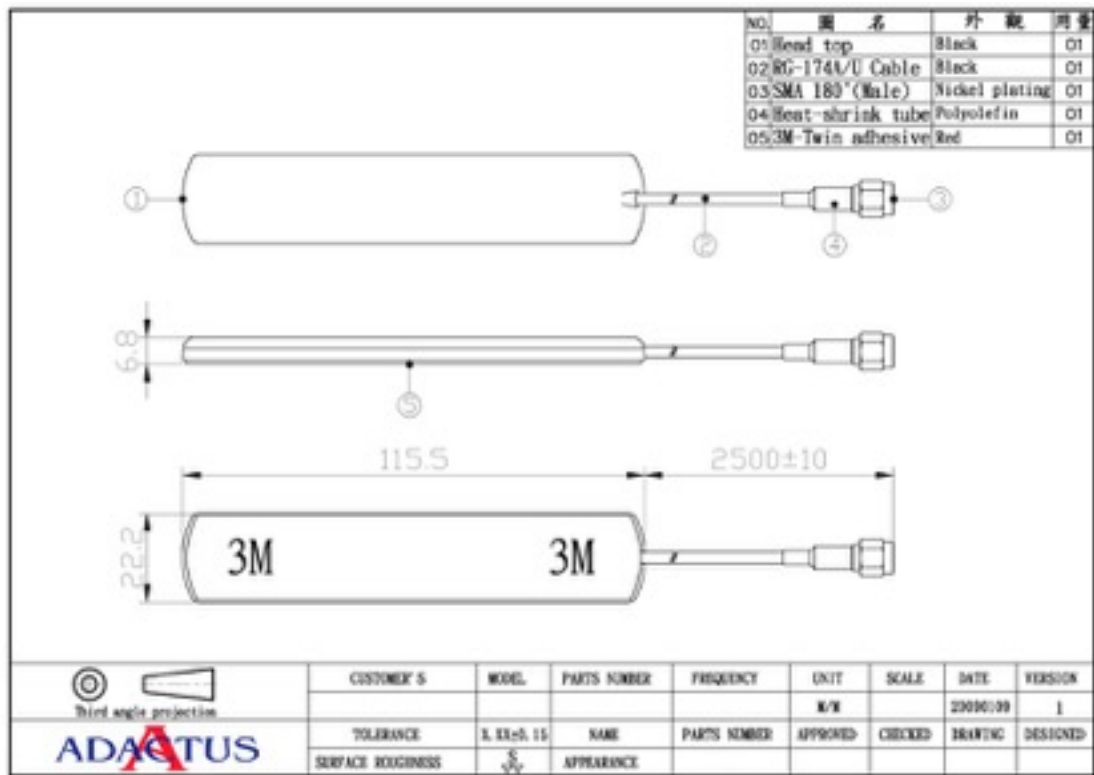

Ordering codes

Type	Description	Comment
ADA-0068-5G	Adhesive Tape	LTE/5G

For the latest updates, visit our Web site: www.adactus.se

Disclaimer

Information furnished is believed to be accurate and reliable. However, Adactus assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Adactus reserves the right to make changes without further notice to any product herein to improve reliability, function or design. Adactus does not assume any liability arising out of the application or use of any product described herein.

This publication supersedes and replaces all information previously supplied. Adactus products are not authorised as critical components in life support devices or systems.

