
GSM/3G External Antenna

- **GSM/3G Antenna Penta Band**
- **Weather Proof**
- **External**
- **3 dBi Gain**



ADA-0169 is a Penta band GSM/3G antenna with SMA connector, delivered with 5m fixed RG58 low loss cable. Suitable for fixed wireless communication devices in remote areas. Omnidirectional performance.



Specification

Antenna	Specification
Frequency	850/900/1800/1900 & 2100MHz
Polarization	Vertical
V.S.W.R	<2.0:1
Impedance	50 Ω
Return Loss	See Diagram
	Environmental Conditions
Operating Temperature	-40°C ~ + 80°C
Storage Temperature	-40°C ~ + 80°C
Relative Humidity	40% to 95%
	Mechanical Specification
Antenna Color	Black
Cable	RG58 Low Loss, 5m, other cables on request.
Connector	SMA (M), other connectors on request.
Size	267mm
Weight	245g Max.
Mounting	Bracket with Screws

Return Loss & SWR

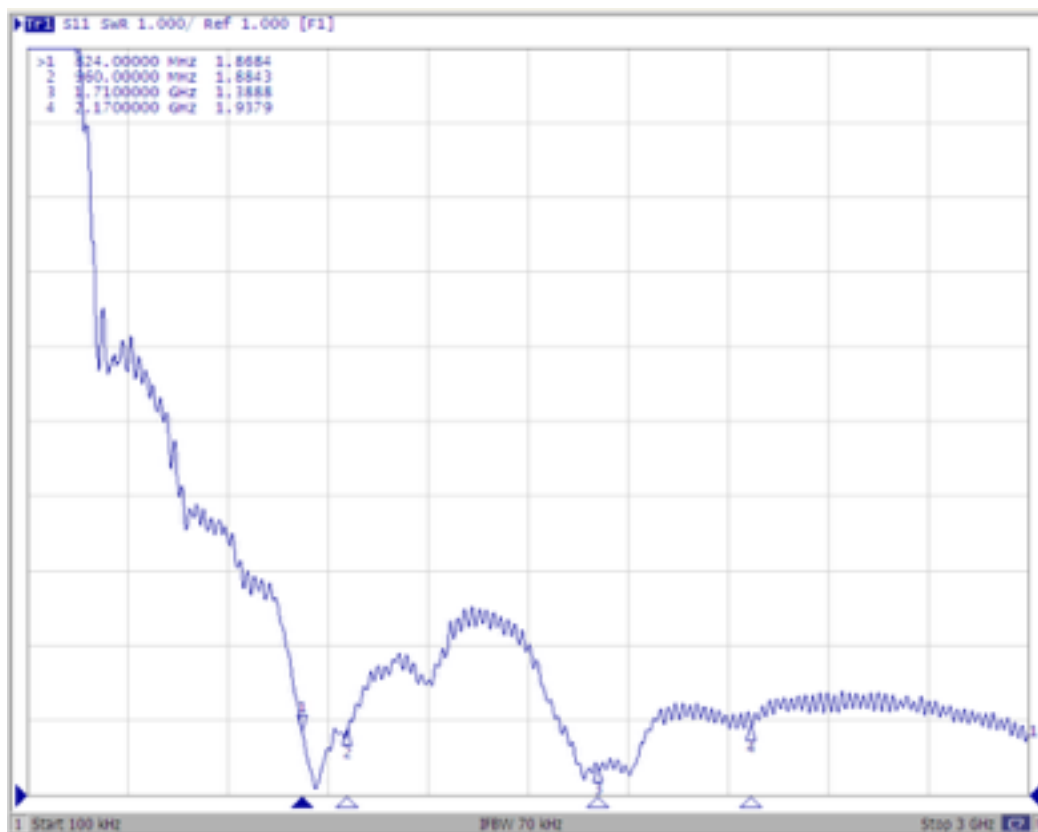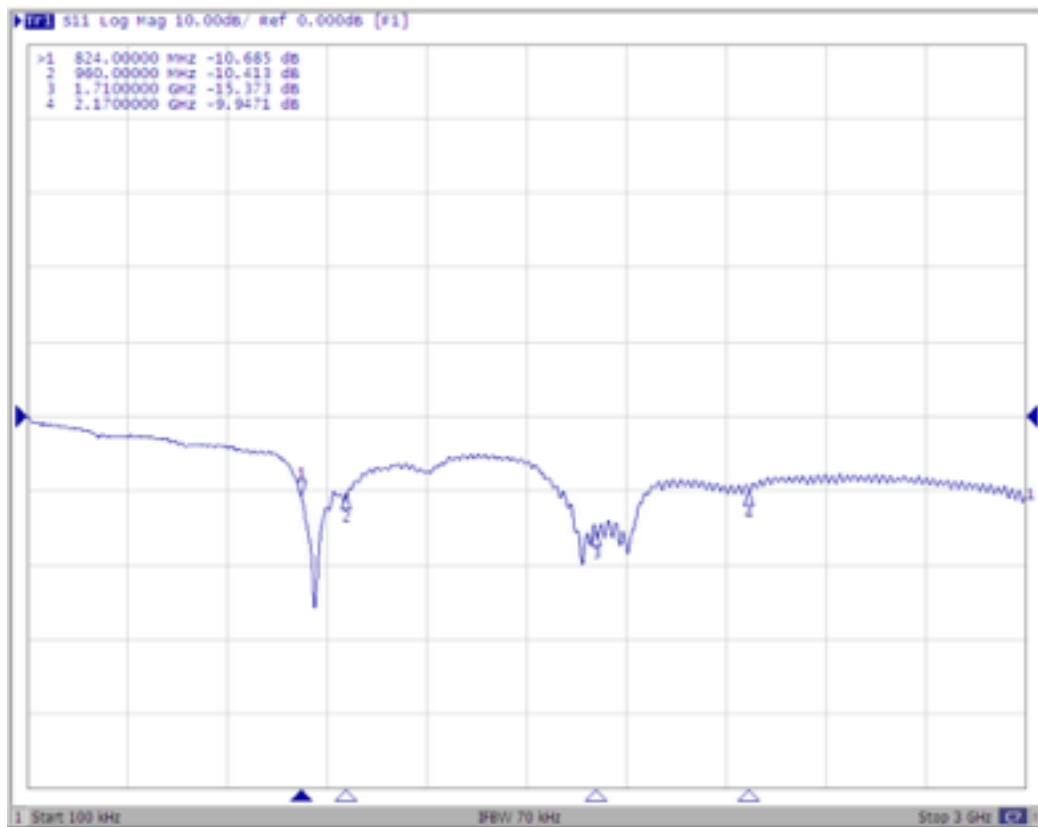

Ordering codes

TYPE	Description	Comment
ADA-0169	External GSM Antenna	Penta band GSM/3G Antenna

For the latest updates, visit our Web site: www.adactus.se

Disclaimer

Information furnished is believed to be accurate and reliable. However, Adactus assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Adactus reserves the right to make changes without further notice to any product herein to improve reliability, function or design. Adactus does not assume any liability arising out of the application or use of any product described herein.

This publication supersedes and replaces all information previously supplied. Adactus products are not authorised as critical components in life support devices or systems.