


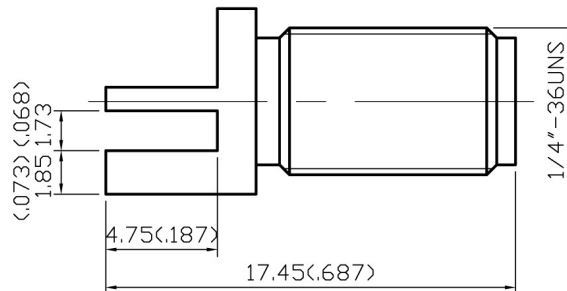
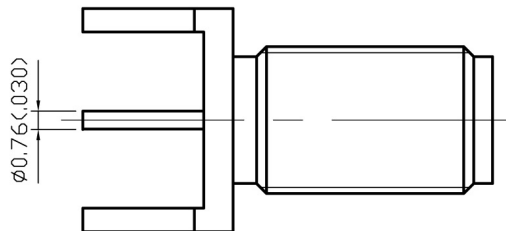


NO	DESCRIPTION	DATE
①	BACKGROUND FORMAT UPDATED	06.04.02'
②	BACKGROUND FORMAT UPDATED	11.18.08'



1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-18 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 WORKING VOLTAGE: 500 VOLTS MAX.
- 1.4 PROOF VOLTAGE: 1000 VOLTS
- 1.5 VSWR: 1.23 MAX.

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A

5.0 ENVIRONMENTAL


- 5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

5	NUT	BRASS	1	GOLD
4	WASHER	BRASS	1	GOLD
3	INSULATION	TEFLON	1	NONE
2	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD 50 μ " MIN.
1	BODY	BRASS	1	GOLD 3 μ " MIN.
NO	DESCRIPTION	MATERIAL	Q' TY	FINISH

APPROVED

by _____

DATE: _____

DESCRIPTION			SMA EDGE MOUNT BULKHEAD JACK RECEPTACLE									
製圖	DRAWN	TOLERANCE		品名	ADA-1970 T.G.G				日期	DATE	版次	REV.
	Yoko	.X	±0.2	TITLE	\ROHS COMPLIANT (50Ω)				10.19.99'		A-2	
檢圖	CHECK	.XX	±0.1	單位	UNIT	DWG.NO. 19-0041						
	Lewis	.XXX	±0.05	比例	SCALE							
認定	APPROVAL	.XXX	±0.05	比例	SCALE							
	Lewis	ANGLE	±5°	比例	4:1							

